



ELECTRO-MECHANICS

ILW170N571N1 Flickerless Power supply

PSDV170571A



■ Model Name : PSDV170571A  
ILW170N571N1

■ Features :

- Class II
- UL8750 / UL1310 Class 2
- Flickerless
- Full-protection provided: OCP/OVP/OTP/SCP/OLP
- Low Power Dissipation @ No Load : <1.0W
- Wide Vout : 15 ~ 25Vdc
- Meets safety requirements for lighting
- Constant Current Type



※ Out Terminal Block Wiring Method : Factory Wiring @ UL

## SAMSUNG ELECTRO-MECHANICS CO., LTD

150, Maeyoung-Ro, Youngtong-Gu, Suwon-Si, Gyeonggi-Do, Republic of Korea 443-743

TEL: +82-31-210-5114, www.samsungsem.co.kr



ELECTRO-MECHANICS

ILW170N571N1 Flickerless Power supply

**PSDV170571A****■ Electrical specification**

No.	Item	Min	Typ	Max	Unit	Remark	
1	Nominal Input Voltage	110		240	Vac		
2	Wide Input Voltage	100		264	Vac		
3	Maximum Input Current			0.35	Arms		
4	Nominal Input Frequency	50		60	Hz		
5	Wide Input Frequency	47		63	Hz		
6	Power Factor (PF)	0.9				1)	
7	Total Harmonic Distortion (THD)			13	%	1)	
8	Inrush Current	Meets NEMA 410				2)	
9	Output Voltage	15	18	25	Vdc		
10	Output Current	532	560	588	mA	@25Vdc Load	
		542	570	599	mA	@18Vdc Load	
		546	575	604	mA	@15Vdc Load	
11	Ripple Current			57	mA	20MHz Bandwidth, 3)	
12	Turn-on Delay			1,000	ms	@Cold Start, 4)	
13	Electrical Efficiency	80	84		%	3)	
14	No Load Power Dissipation			1	W	@ LED OPEN	
15	Output Open LED Protection		42.5	50	Vdc	Auto-recovery	
16	Output Short Circuit Protection	-	-	-	-	Auto-recovery	
17	Over-temperature Protection	-	-	-	°C	Auto-recovery	
18	Case Temperature (Tc)			80	°C		
19	Storage Temperature	-20		80	°C		
20	Operating Temperature	-20		50	°C		
21	Humidity	20		85	%		
22	Insulation Resistance	10			MΩ	500Vdc between Input & Output	
23	Differential Mode (Line to Line)	2.5	5		kV	5)	
24	Common Mode (Line to Ground)	8			kV	5) 6)	
25	Contact Discharge Test Voltage	2	4		kV	7)	
26	Air Discharge Test Voltage	4	8		kV	7) 8)	
27	Dielectric Withstand Voltage	Input to Output	3,750			Apply for 1 minute 9)	
28		Input to Case	-	-	-		Vac
29		Output to Case	-	-	-		Vdc

**SAMSUNG ELECTRO-MECHANICS CO., LTD**

150, Maeyoung-Ro, Youngtong-Gu, Suwon-Si, Gyeonggi-Do, Republic of Korea 443-743

TEL: +82-31-210-5114, www.samsungsem.co.kr

**Application Notes**

- 1) Test Condition:100/264Vac 50/60Hz Input,Typical LED Load ,Ambient Temperature 25°C, Measure at the cable-end
- 2) Input 120Vac, < 192Apeak@1.2ms, < 74I<sup>2</sup>t
- 3) Test Condition: 240Vac 60Hz Input, LED Max. Load, 30min Aging, Ambient Temperature 25°C
- 4) At least, Turn-On Time should be continued for 1sec.
- 5) Surge Specification above is higher than IEC/EN 61000-4-5 (Differential 1kV, Common 2kV)
- 6) The metal case of the LED driver must be connected with F.G
- 7) ESD Specification above meets IEC/EN 61000-4-2 Requirements (Contact 4kV, Air 8kV)
- 8) The metal case of the driver should be grounded.
- 9) Determined by Paragraph 34.1.2, UL1310 or Paragraph 8.4.2, UL8750, EN61347-1, EN61347-2-13

**Safety Standards**

Including safety requirements above, the LED driver complies with the following safety standards:

No.	Item	Description
1	UL8750, UL1310	UL Safety Standards (Class 2, Dry and Damp Location)
2	FCC Part 15, Class B	Conducted and Radiated Emission Test
3	IEC/EN 61347-1, IEC/EN 61347-2-13	IEC/EN Safety Standards
4	IEC/EN 55015	Conducted and Radiated Emission Test
5	IEC/EN 61000-3-2	Harmonic current emissions: Class C
6	IEC/EN 61000-3-3	Voltage Fluctuations and Flicker
7	IEC/EN 61000-4-2	Electrostatic Discharge (ESD): Contact 4kV, Air 8kV
8	IEC/EN 61000-4-3	Radio-frequency Electromagnetic Fields
9	IEC/EN 61000-4-4	Electrical Fast Transients (EFT)
10	IEC/EN 61000-4-5	Surges: Differential 1kV, Common 2kV
11	IEC/EN 61000-4-6	Injected Currents
12	IEC/EN 61000-4-8	Power Frequency Magnetic Fields
13	IEC/EN 61000-4-11	Voltage Dips and Short Interruptions


**SAMSUNG ELECTRO-MECHANICS CO., LTD**

150, Maeyoung-Ro, Youngtong-Gu, Suwon-Si, Gyeonggi-Do, Republic of Korea 443-743

TEL: +82-31-210-5114, www.samsungsem.co.kr




### Life Time vs Tcase

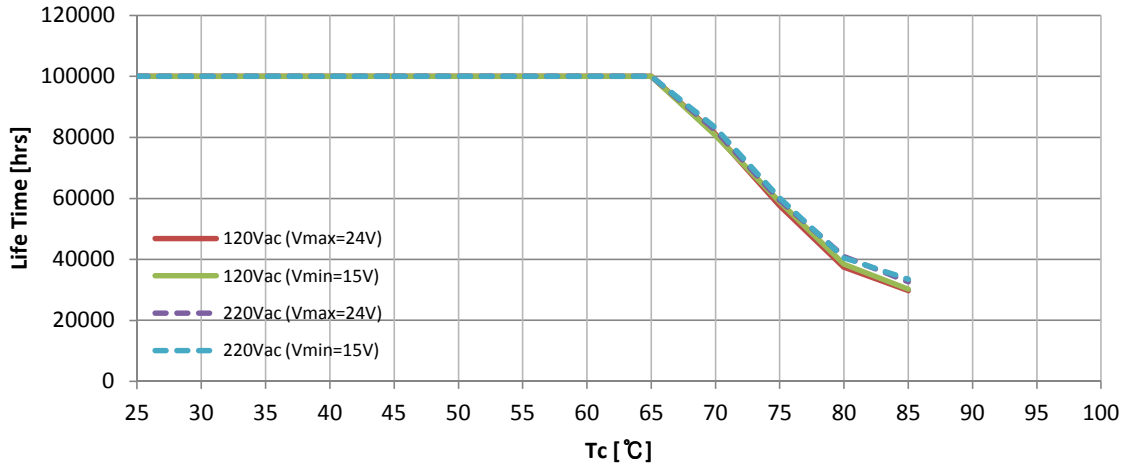

Remark) LED Driver has a rated lifetime of 50,000 hours @ Tc≤70°C

### Efficiency(%)

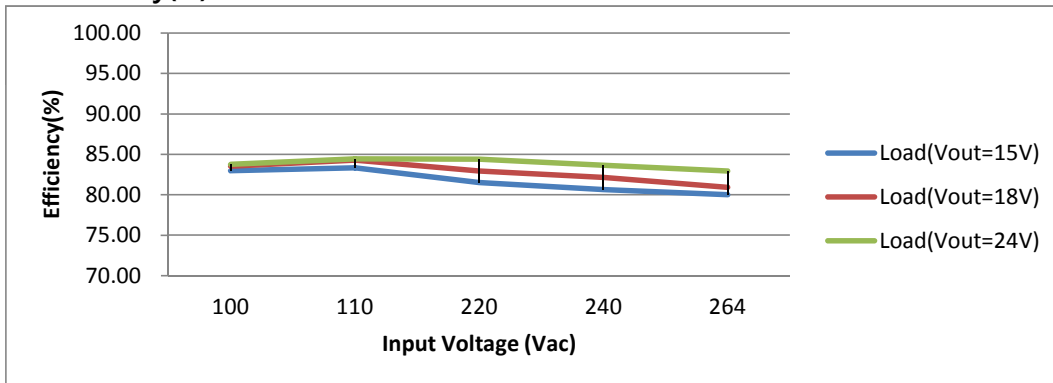


## SAMSUNG ELECTRO-MECHANICS CO., LTD

150, Maeyoung-Ro, Youngtong-Gu, Suwon-Si, Gyeonggi-Do, Republic of Korea 443-743


TEL: +82-31-210-5114, [www.samsungsem.co.kr](http://www.samsungsem.co.kr)




### Power Factor

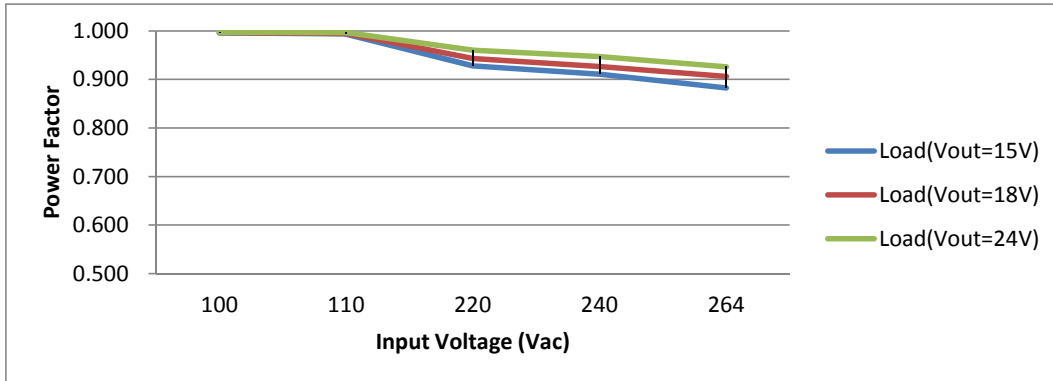

### THD(%)

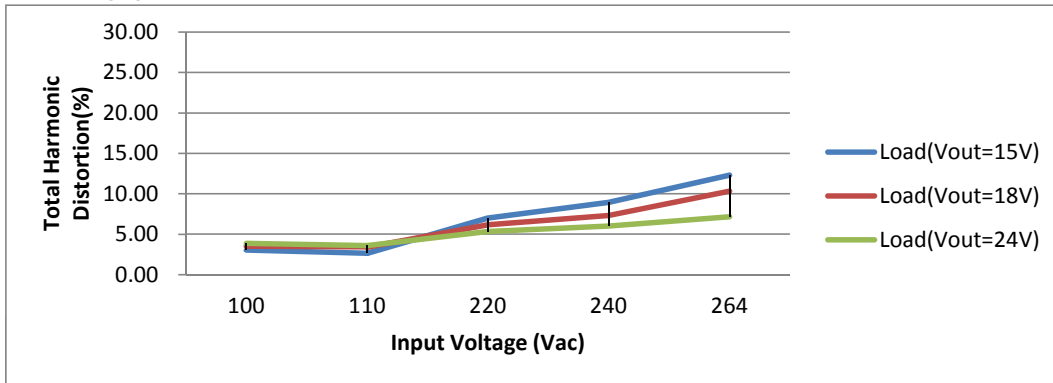

### Output Current(mA)

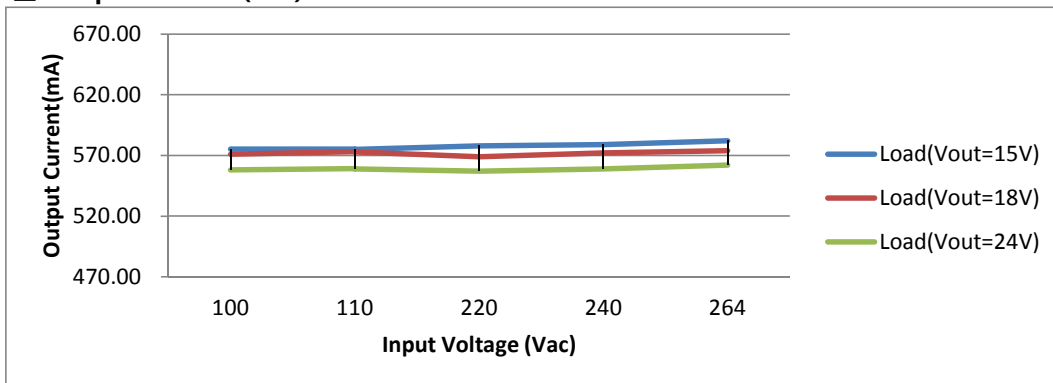

## SAMSUNG ELECTRO-MECHANICS CO., LTD

150, Maeyoung-Ro, Youngtong-Gu, Suwon-Si, Gyeonggi-Do, Republic of Korea 443-743

TEL: +82-31-210-5114, [www.samsungsem.co.kr](http://www.samsungsem.co.kr)




ELECTRO-MECHANICS


ILW170N571N1 Flickerless Power supply

**PSDV170571A**


■ Mechanical Specification

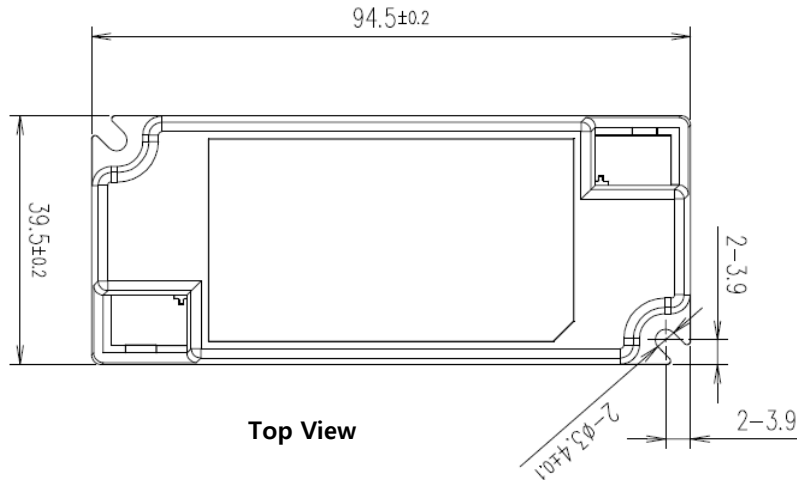

Top View

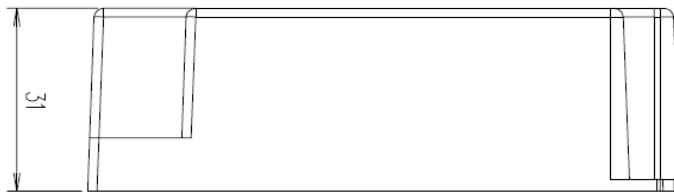

Side View

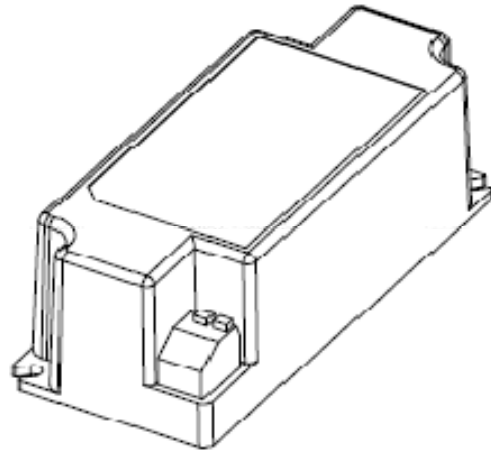

■ Enclosure Size

Unit	Width	Length	Height	Mount Length	Overall Length
mm	39.5	94.5	31.0	86.7	94.5
inch	1.56	3.72	1.22	3.41	3.72


■ Case Material : PC

**SAMSUNG ELECTRO-MECHANICS CO., LTD**

150, Maeyoung-Ro, Youngtong-Gu, Suwon-Si, Gyeonggi-Do, Republic of Korea 443-743

TEL: +82-31-210-5114, [www.samsungsem.co.kr](http://www.samsungsem.co.kr)

### ■ Wiring Diagram

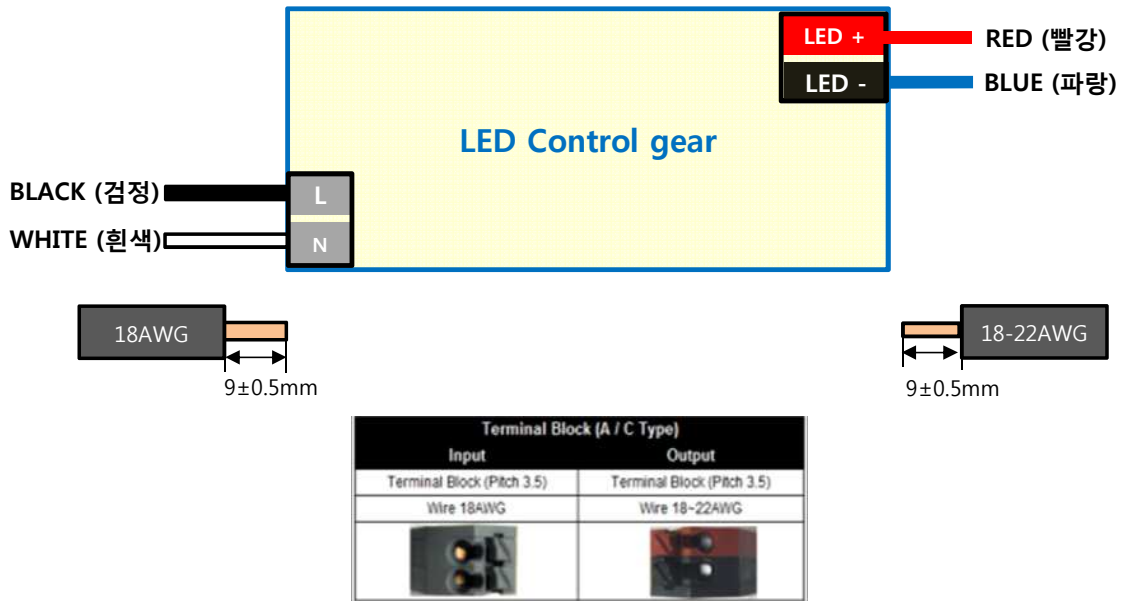

### ■ Rating Label Drawing



## SAMSUNG ELECTRO-MECHANICS CO., LTD

150, Maeyoung-Ro, Youngtong-Gu, Suwon-Si, Gyeonggi-Do, Republic of Korea 443-743

TEL: +82-31-210-5114, www.samsungsem.co.kr



ELECTRO-MECHANICS

ILW170N571N1 Flickerless Power supply

PSDV170571A

Barcode Label

2015-01-01 Samsung Electro-Mechanics

DATE / PRODUCTION

BARCODE

LOT NO

C 1 1 5 1 0 7 1 1 6 0 0 0 1 REV.A01

- 7 DEVELOPMENT Rev X01~99
- MP Rev A01~99
- 6 SERIAL No 4 Digit
- 5 MODEL CODE 3 Digit
- 4 PRODUCTION DATE 2 Digit
- 3 PRODUCTION MONTH 1 Digit
- 2 PRODUCTION YEAR 2 Digit
- 1 PRODUCTION COUNT 2 Digit

Mean	1.PLANT	2. YEAR	3. MONTH	4. DATE	5. CODE	6. SERIAL	7. Revision No
Digit	2	2	1	2	3	4	
EX.	C1 : DSEM C2 : Solytech C3 : IM C4 : Ap tech K1 : Korea	00~99	1...9,A,B	01~31	116	0001.. 9999	X01~99 : DEVELOPMENT  A01~99: MP

Box Label

Material Code	ILW170N571N1		USER Model Code
ITEM	PSDV170571A REV. A**		SEMCO Model Code
LOT No	*****	MAKER	SEMCO LOT NO & Quantity of Products
Quantity [PCS]	84	SEMCO	
EXP. Date	20**.**.* ~ 20**.**.*		Product Date ~ After 5 years
*****			USER Barcode

Digit	Year			Month		Data		Factory		Fixed		
	1	2	3	4	5	6	7	8	9			
N	0	5	1	2	D	0	0	1				
M→2014	01~12月		01~31日		D : DSEM							
N→2015					S : Solytech							
P→2016					M : IM							
Q→2017					A : Aptech							

Digit	Quantity Per BOX									BOX Size	Serial No.	Blank	Vender Code	Blank	Year	Month	Data	Factory	Fixed											
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
	0	0	0	0	0	0	0	4	2	B	0	0	1		E	6	0	1				N	0	5	1	2	D	0	0	1
											A : Pallet	001~999				M→2014	01~12月	01~31日	D : DSEM											
											B : BOX				N→2015	S : Solytech														
															P→2016	M : IM														
															Q→2017	A : Aptech														

SAMSUNG ELECTRO-MECHANICS CO., LTD

150, Maeyoung-Ro, Youngtong-Gu, Suwon-Si, Gyeonggi-Do, Republic of Korea 443-743

TEL: +82-31-210-5114, www.samsungsem.co.kr





ELECTRO-MECHANICS



ILW170N571N1 Flickerless Power supply

**PSDV170571A**


■ Packing Drawing

1. Out Box


Dimmension	540(L) 355(W) 105(H) [mm]
Weight	< 10Kg
Quantity	84EA / 1Box

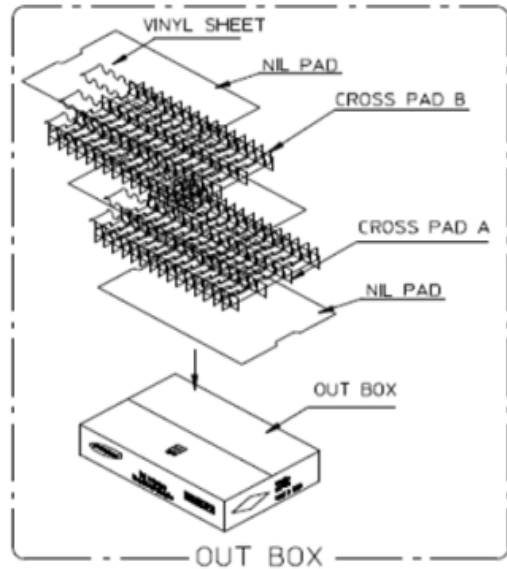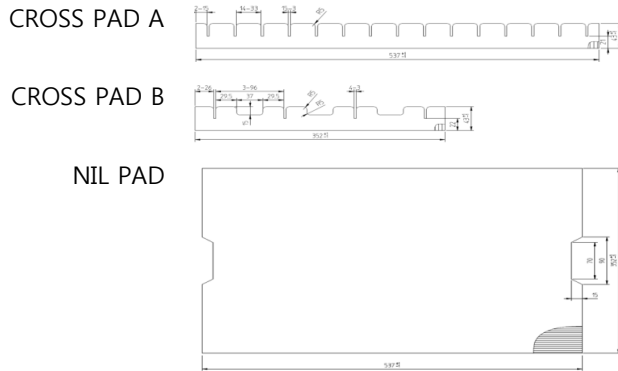

OUT BOX

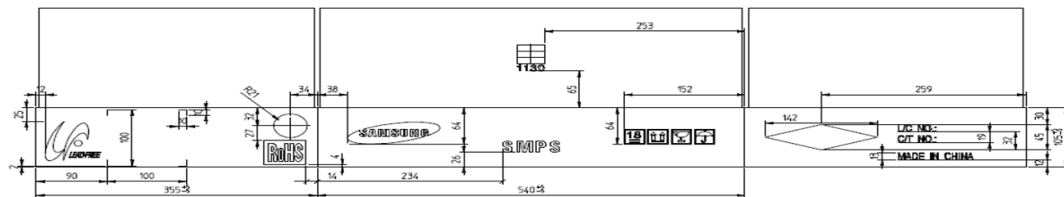

2. Pallet

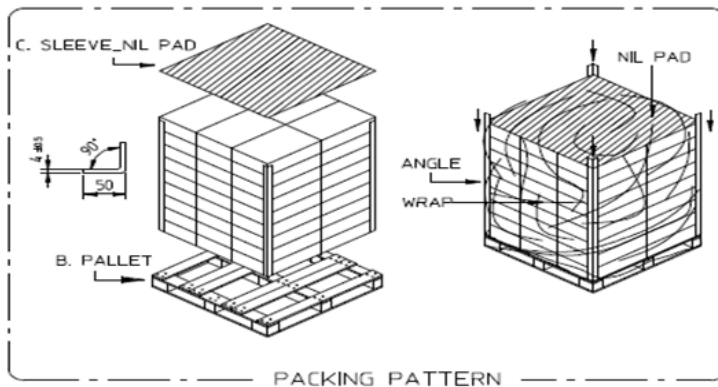

**SAMSUNG ELECTRO-MECHANICS CO., LTD**

150, Maeyoung-Ro, Youngtong-Gu, Suwon-Si, Gyeonggi-Do, Republic of Korea 443-743

TEL: +82-31-210-5114, www.samsungsem.co.kr